


NOTES:

1. WELDING NOT PERMITTED
2. WHEN BOLT DOWN GRATES ARE SPECIFIED, PROVIDE TWO SLOTS IN THE GRATE THAT ARE VERTICALLY ALIGNED WITH THE HOLES IN THE FRAME. LOCATION OF BOLT DOWN SLOTS VARIES AMONG DIFFERENT MANUFACTURERS.
3. REFER TO WSDOT STANDARD SPECIFICATION 9-05.15(2) FOR ADDITIONAL REQUIREMENTS.
4. FOR FRAME DETAIL, SEE STD. PLAN D4.1
5. THE THICKNESS OF THE GRATE SHALL NOT EXCEED 1-5/8".

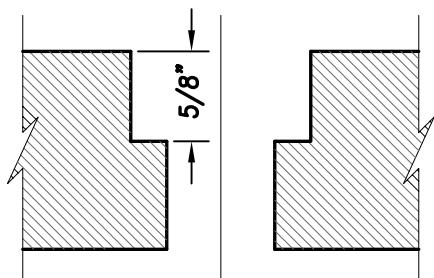

SLOT DETAIL

STANDARD HERRINGBONE CATCH BASIN GRATE
NTS