



SILT DIKE UNIT - CUT SECTION

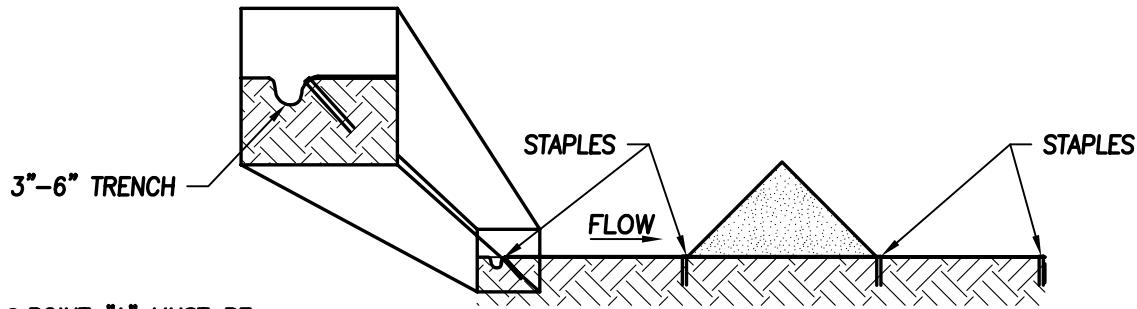

- POINT "A" MUST BE HIGHER THAN POINT "B" TO ENSURE THAT WATER FLOWS OVER THE DIKE AND NOT AROUND THE ENDS.

DETAIL A-A

- STAPLES SHALL BE PLACED WHERE THE UNITS OVERLAP AND IN THE CENTER OF THE 7' UNIT AS SHOWN ON THE DIAGRAMS

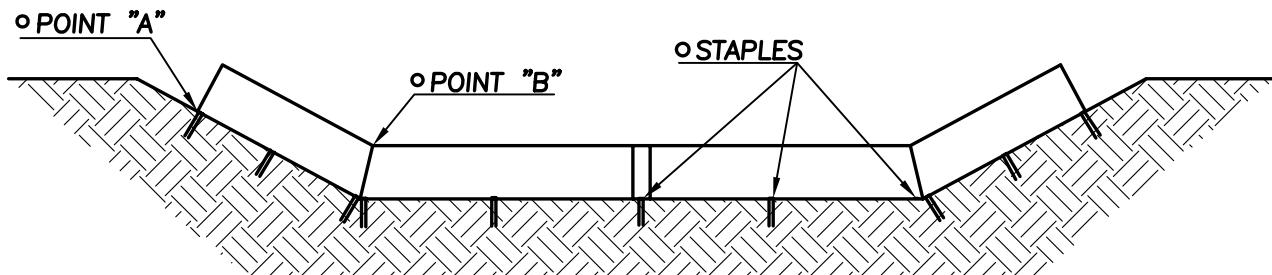

NOTES:

1. THE DIKES SHALL BE ATTACHED TO THE GROUND WITH WIRE STAPLES. THE STAPLES SHALL BE NO. 11 GAUGE WIRE AND BE ATLEAST 6" TO 8" LONG.
2. STAPLES SHALL BE PLACED AS INDICATED ON THE INSTALLATION DETAIL.
3. CAN BE USED FOR DITCH CHECK DAMS, DIVERSION DIKES, DROP INLET PROTECTION, TEMPORARY DITCH LINER OR SILT FENCE (IN SOME APPLICATIONS).

DIKE SECTION DETAIL B-B

TRIANGULAR SILT CHECK DAM
NTS