




WATERTIGHT

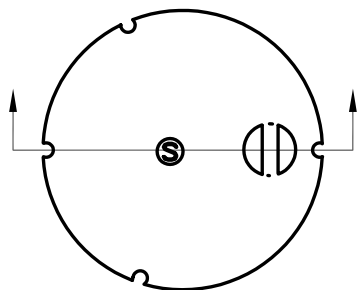

LOCKING



STANDARD





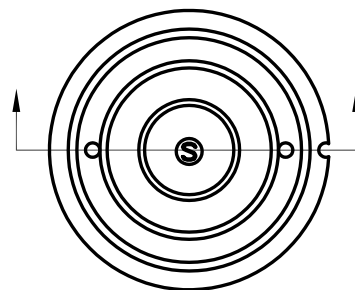


1/2" - 13 N.C. x 1
1/8" HEX. HD. S.STEEL
CAP SCREW 3 REQ'D
PER COVER 120° APART

3/4"Ø HOLES
TAPERED

- ALL GROOVES
1/8" WIDE X
1/8" DEEP AND
3/4" O.C.
INSIDE 21-3/4"
Ø 1/8" GROOVE

**2 HOLE COVER, SANITARY
SEWER (16 HOLE STORM
SEWER ONLY)
MANUFACTURED BY:
OLYMPIC FOUNDRY,
SEATTLE OR INLAND
FOUNDRY, SPOKANE**

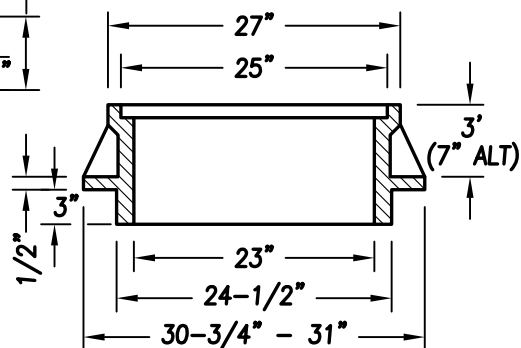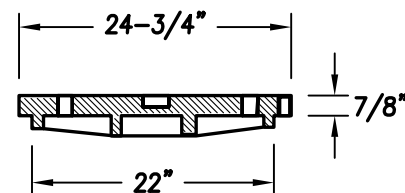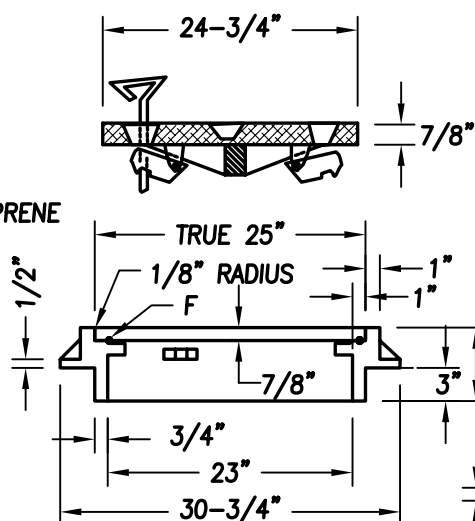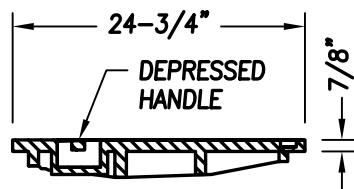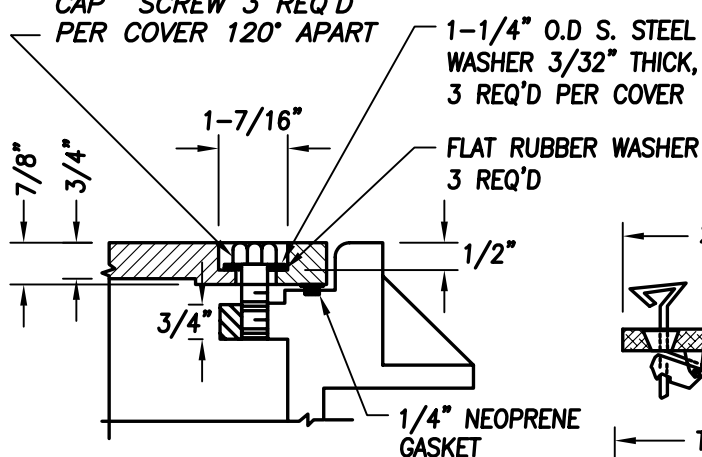

WATERTIGHT FRAME

STANDARD & LOCKING FRAME

NOTES:

1. COVER & FRAME TO BE MACHINED TO A TRUE BEARING ALL AROUND.
2. MATERIAL SHALL BE OF GREY CAST IRON, A.S.T.M. A-48, CLASS 30.

STANDARD MANHOLE FRAMES & COVERS

NTS